

TECHNICAL DATA SHEET

SM G.652.D CENTRAL LOOSE TUBE ROUND DROP CABLE


CABLE CONSTRUCTION

Cable Type	SM G.652.D CENTRAL LOOSE TUBE ROUND DROP CABLE
Fiber Count	1 Fiber to 12 Fibers
Fiber Type	Single Mode Fiber as per ITU-T G.652.D
Fiber Color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Rose, Aqua
Number of Loose Tubes	1
Loose Tube Material	PBT
Jelly Compound inside LT	Thixotropic Jelly Filling Compound
Strength Member	2 x Parallel Galvanized Steel Wires placed at two sides for Robust strength
Strength Member (Optional)	2 x Parallel FRP placed at two sides for Robust strength as per customer requirement
Outer Sheath (Material)	Medium/High Density Polyethylene (HDPE/MDPE)
Outer Sheath (Color)	Black
Outer Diameter of Cable	6mm - 6.5mm Nominal
Outer Sheath Printing	LITECH PAKISTAN (PRIVATE) LIMITED= No. of Fiber = FTTH Round Drop OFC = Year of Mfg = LM
Packing	Suitable Strong Reel
Cutting Length	2000 or 4000 meter \pm 5% or as requested in smaller length.

CROSS SECTIONAL DRAWING



Picture is for reference only.

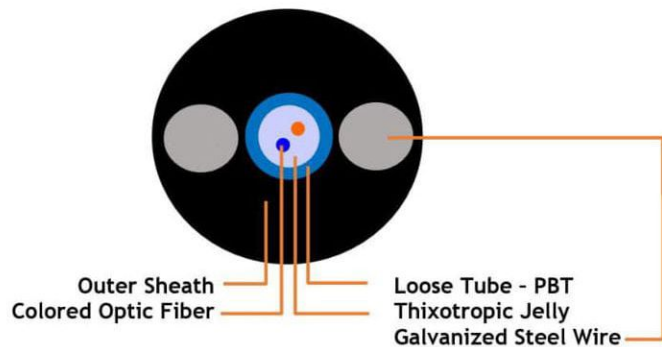

Technical Characteristics

- Low Weight
- Easy to install & joint
- HDPE Sheath

Construction:

- SM G.652.D Fiber
- PBT Loose Tube
- Thixotropic Jelly inside Loose Tube
- Strength Member (2 x Steel Wires)
- Outer Sheath (HDPE)



FIBER PROPERTIES

OPTICAL CHARACTERISTICS	
Single Mode Fiber	CORNING SMF-28e+ G.652D
Fiber Colour Coding	As per TIA/EIA-598A&C
Mode Field Diameter, μm	8.6 to 9.5 \pm 0.7
Cladding Diameter, μm	125 \pm 1
Core Clad Concentricity error, μm	\leq 0.8 μm
Cladding Non-Circularity, %	\leq 2 %
Cable Cut-off Wavelength, nm	\leq 1260 nm
Chromatic Dispersion (ps/nm.km)	\leq 3.5 @ 1310nm \leq 18 @ 1550nm
Cabled Attenuation @ 1310 nm (dB/km)	\leq 0.35 (average)
Cabled Attenuation @ 1550 nm (dB/km)	\leq 0.21 (average)
Polarized Mode Dispersion (PMD) ps/√km	\leq 0.2

MECHANICAL CHARACTERISTICS	
Tensile Strength	1000N (Maximum)
Crush Resistance	100N (Maximum)
Impact Resistance	0.5 Kg From Meter Height
Repeated Bending Test	10 Cycle
Torsion Test	No. of Cycles: 05 Twist Angle: \pm 180°
Cable Bending Test	10 X Cable Diameter (No Load) 20 X Cable Diameter (Full Load)
Temperature Range	-10 °C to +70 °C

Note: All Mechanical & Environmental Test Shall be Conducted as per IEC-60794 Standard.

MANUFACTURER	
Manufacturer	LITECH PAKISTAN (PRIVATE) LIMITED
Country of Origin	ISLAMIC REPUBLIC OF PAKISTAN
ISO	ISO 9001:2015 CERTIFIED

Litech Pakistan (Private) Limited

FACTORY / REGISTERED OFFICE

Plot # 95, Phase II,
M-3Industrial City,
Faisalabad

Ph#: +92-41-2626672-73

Fax: +92-41-2626671

Email: info@litech.com.pk

FAISALABAD

Office No.01,Ground Floor.
Lyalpur Regency Plaza,949
New Civil Lines, Faisalabad

Ph#: +92-41-2626672-73

Fax: +92-41-2626671

Email: fsd@litech.com.pk

KARACHI

61-C,2nd Floor.
21st Commercial Street,
Phase II Ext, DHA Karachi

Ph#: +92-21-35885568-69

Fax: +92-21-35885570

Email: Khi@litech.com.pk

ISLAMABAD

5th Floor, Tower 10,
Sector E-11/1 Markaz
Islamabad

Ph#: +92-51-8744109-10

Fax: +92-51-8744110

Email: Isb@litech.com.pk

